


INSTRUCTIONS EL NIÑO BOSTER PUMP



NB: Use teflon tape to seal all couplings!!!

NB: Boosterpump should be placed lower than by-pass for maximum prestanda. The boosterpump has a maximum head of approx. 3,0 meter (10.0 ft) depending on existing circulation pump.
Flow rate should measure 3-6 liters/minute.

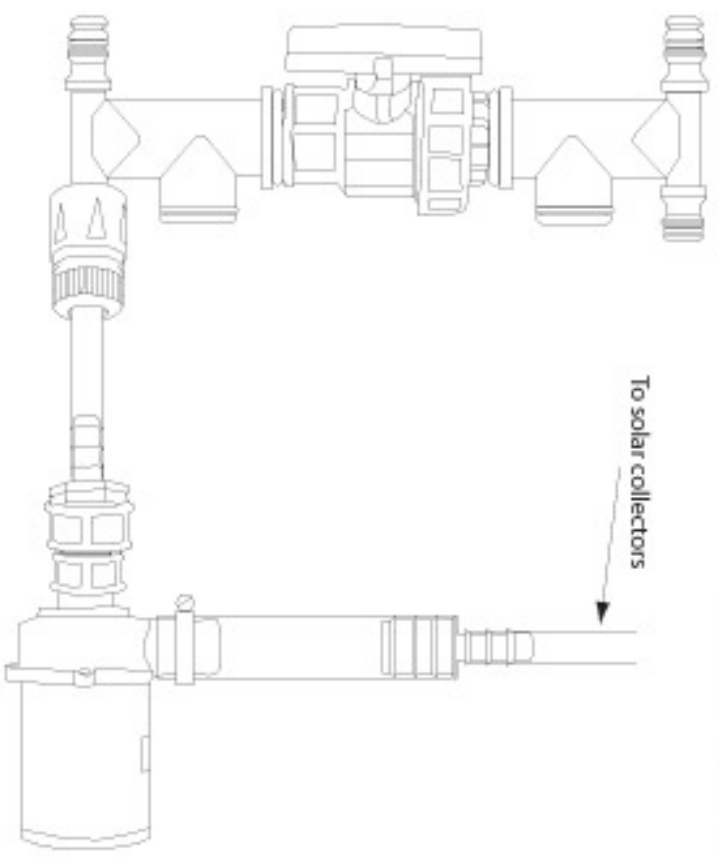